



HOTMIX VEHICLE CROSSOVER SECTION

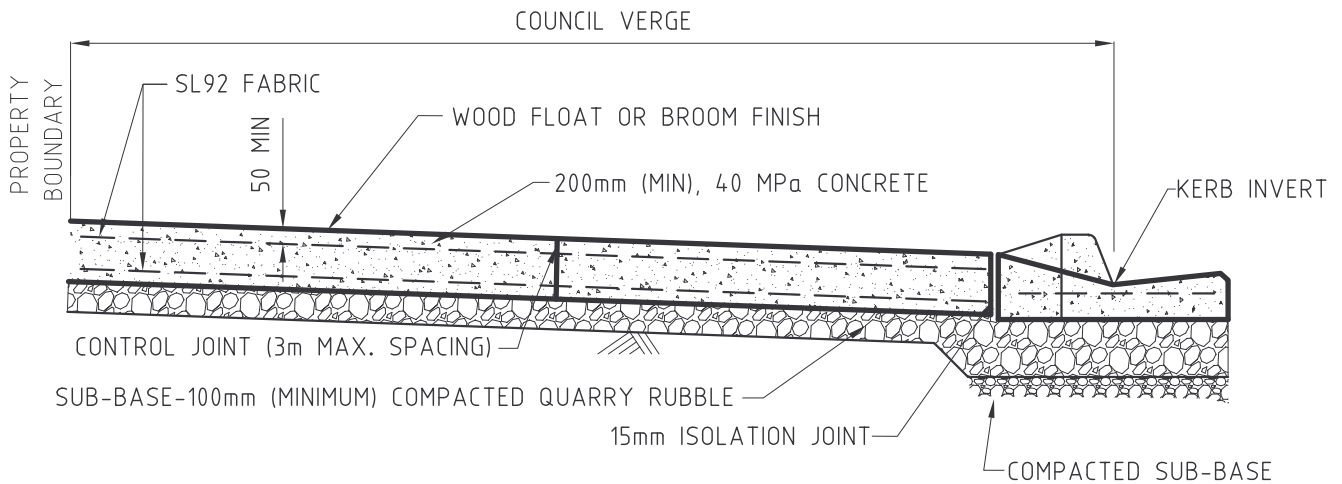

CONCRETE VEHICLE CROSSOVER SECTION

NOTE:-

1. THIS STANDARD IS A MINIMUM PAVEMENT REQUIRED FOR VEHICLES WITH A "GVM" GREATER THAN 15 TONNE, IN PARTICULAR DRIVEWAYS USED FOR FUEL TANKERS AND LARGE HAULAGE VEHICLES. ALTERNATIVE PAVEMENTS WILL BE CONSIDERED IF SUPPORTED WITH A DESIGN AND CERTIFICATION FROM A CHARTERED PROFESSIONAL ENGINEER IN PAVEMENTS.
2. ALL KERBING CONCRETE TO CONTAIN BLACK OXIDE UP TO THE RATE OF 10Kgs./Cu.M., TO MATCH EXISTING.
3. ALL CONSTRUCTION TO BE IN ACCORDANCE WITH COUNCIL'S "TECHNICAL SPECIFICATION FOR CONCRETE WORK".
4. SEWER INSPECTION POINT TO BE ADJUSTED TO SUIT NEW LEVEL.
5. THIS DETAIL REPRESENTS PAVEMENT DETAILS ONLY AND VERTICAL ALIGNMENT IS NOT TO BE TAKEN FROM THIS DRAWING. FOR VERTICAL ALIGNMENT REFER TO SD-13.



STANDARD DETAIL

COMPLYING HEAVY DUTY
COMMERCIAL ENTRANCE

PLAN No.

SD-16

APPROVED..... C.HASKAS

Manager Civil Design

DATE..... 11/4/07

DRAWN/DESIGNED

N.SCOTT

CHECKED

A.S. TAYLOR

CAD FILE NAME

SD-16.dwg

SHEET SIZE

A4

REVISION

0